



Nautical Equipment
2027

Simply the brightest.



The company ASTEL d.o.o. was established in 1991 and has been one of the leading European manufacturers of video surveillance equipment for over a decade. Experiences in the field of security and GSM alarm systems led to the development and production of electronic marine equipment that provides a high level of safety and dependability of operation.

The ASTEL MARINE brand name was launched in 2004 and very soon it has become one of leading brand name in marine industry.

"We strive for technical perfection in all of our products, and the key directions of our company have always been innovation and distinctiveness. The wide range of our marine and architectural fittings are of the highest possible quality made from carefully selected components and professional solid materials."

Our Story



1991 WHEN IT ALL BEGAN

What began as years of curiosity and exploration in electronics led two brothers to start a business in a small room - launching our journey with CCTV video surveillance equipment, driven by passion and big ambitions.

2003 WIRELESS YACHT CONTROL SYSTEM

Patented to ensure safe and highly reliable operation, the Wireless Yacht Control System marks a significant advancement in yacht maneuverability and safety.

2004 ASTEL MARINE

The ASTEL MARINE brand name was launched in 2004 and very soon became one of the leading brand names in marine industry.

2007 CONVEX, PLAQUE

The CONVEX series is designed for standard surface-mount installation on the stern of the hull, while the PLAQUE series is intended for flush-mount installation.

2008 CONUS

Presented at METS 2008, the CONUS underwater light was also registered as a European Community Design with the OHIM. Its slope-truncated cone-shaped casing allows for installation on the hull to light in custom direction.

2009 EQUATOR

The thinnest surface-mount underwater LED light on the market to this day. Registered at european community design for EQUATOR underwater light at OHIM and patented in 2011.

Timeline



2010 INTERIOR & EXTERIOR LIGHTS

The launch of INTENSA series of compact lights and ARCUS series of step or staircase multi-color RGB LED lights.



2011 ASTRA

Standouts for its slim profile of just 12 mm thick, making it one of the thinnest surface-mounted LED downlights on the market.

EQUATOR MULTICOLOR

Multi-color RGB underwater LED lights EQUATOR MSR0640 and EQUATOR MSR1280 series.



2012 DMX CONTROL

DMX512 interface enables the connection and control of all models of Astel Marine LED lights by the help of standard DMX512 controllers or board computers.



2013 EQUATOR & CONVEX SUPERYACHT LIGHTS

The ultra-power professional super yacht Underwater LED Lights.



2014 PLAQUE & CONVEX SUPERYACHT LIGHTS

The ultra-power professional SuperYacht Underwater LED Lights with separate power supply units (drivers) for installation with corresponding cofferdams which enable reliable management from the inside of the hull.



2016 I-NOVO AWARD

The new generation of EQUATOR Underwater LED Lights with perfectly aligned front shape got designated as second best product in class in the i-NOVO Design category.



2018 DOCK LIGHTS

The CONVEX Underwater LED Dock Light, featuring 18 high-power LEDs for easy installation on piers, floating pontoons, and docks, was presented at METS 2018.



2023 METS Superyacht Pavillion

In year 2023 Astel Marine joined the SuperYacht Pavilion, highlighting our commitment to serving the luxury yachting sector with top-quality products.



2024 ASTEL USA

Our expansion into the United States marked the launch of Astel USA, accompanied by strategic partnerships with a wide network of representatives and exhibitions at Miami International Boat Show, IBEX in Tampa and many others.



2025 MLC01 INTERFACE

We continuously innovate and develop new products to meet evolving market needs. In 2025 MLC01 Interface was released to enhance system integration.



2026 MLT01 TOUCH CONTROL PANEL

The MLT01 Touchscreen Light Control Panel provides a dedicated onboard interface for intuitive control of Astel Marine lighting systems in combination with the MLC01 Light Control Interface.



NEW GENERATION.
ELEVATED PERFORMANCE.

2027 EQUATOR - NEW GENERATION

The new generation of EQUATOR Underwater LED Lights with elevated performance and more lumens with up to:

- 2.300 lm for MSR0640,
- 4.600 lm for MSR1280,
- 10.700 lm for MSR36240.



INTERIOR & EXTERIOR LED LIGHTS

INTENSA MRM0110	15
INTENSA MRM0115	17
INTENSA MRM0220	17
INTENSA MRM0620	17
INTENSA MRM0230	19
INTENSA MRM0340	19
INTENSA MRM0380	19
INTENSA MRM0625	19
ASTRA MSM0115	21
ASTRA MSM0320	21
ASTRA MSM0650	21
ASTRA MRM0230	23
ASTRA MRM0340	23
ASTRA MRM0380	23
ASTRA MRM0625	23
ARCUS MRM01	25

SUPERYACHT INTERIOR LED LIGHTS

SPEIRA MQWAVE01	29
LAENA MQMURO01	31

UNDERWATER LED LIGHTS

EQUATOR MSR0640	35
EQUATOR MSR1280	37
EQUATOR MSR36240	39
CONUS MST0680	41
CONUS MST18240	41
CONUS MSR0680	43
CONUS MSR18240	43
CONVEX MST0680	45
CONVEX MST18240	45
CONVEX MSR0680	47
CONVEX MSR18240	47

PLAQUE MFM0680	49
PLAQUE MFM18240	49

SUPERYACHT UNDERWATER LED LIGHTS

EQUATOR MSR36240P	53
EQUATOR MSR36240S	53
CONVEX MTH18240S	55
CONVEX MSR18240S	55
CONVEX MSR09200	57
CONVEX MSR18300	57
PLAQUE MFM18240S	59
PLAQUE MFM09200	61
PLAQUE MFM18300	61

UNDERWATER LED DOCK LIGHTS

CONVEX MSR0680 AB2WD	65
CONVEX MSR18240 AB2WD	65
CONVEX MST0680 AB2WD	67
CONVEX MST18240 AB2WD	67
EQUATOR MSR0640	69
EQUATOR MSR1280	69
EQUATOR MSR36240	69

WIRELESS YACHT CONTROL SYSTEMS

MYW868B/CP	73
------------	----

ACCESSORIES

DMX512 Interface MXU01	77
PWM Dimmer MDU13	77
Light Control Interface MLC01	79
Touchscreen Light Control Panel MLT01	81
Isolation Board IB01	83
Cofferdam CD01	83

Due to continuous product improvement all specifications and design are subject to change without notice.

Table Of Contents



INTENSA

INTENSA MRM0110
INTENSA MRM0115
INTENSA MRM0220
INTENSA MRM0620
INTENSA MRM0230
INTENSA MRM0340
INTENSA MRM0380
INTENSA MRM0625

ASTRA

ASTRA MSM0115
ASTRA MSM0320
ASTRA MSM0650
ASTRA MRM0230
ASTRA MRM0340
ASTRA MRM0380
ASTRA MRM0625

ARCUS

ARCUS MRM01

Interior & Exterior LED Lights

INTENSA

Compact LED light with electronic driver built-in waterproof anodized aluminium casing designed by using 1 high-power LED or LED array with built-in microprocessor which enables network connections and remote control with digital dimming.

Multi-color RGBW models offer the best illumination quality of different white lighting and microprocessorcontrolled changing of white and all other colors of lighting manually or automatically through the complete rainbow spectrum. The light is designed to adjust the requested white lighting in 21 steps.

Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interface MXU01.

Advanced optical system with reflector and holographic diffuser allows perfect light spread with different color temperature options for interior and exterior.

Due to wide range of prestige massive face shapes made of aluminium or stainless steel the INTENSA is suitable to fit on both luxury yachts and superyachts.

All models are designed for operating at extreme temperature and voltage conditions with thermal, transient and reverse polarity protections.

Features

- Innovative Design
- Anodized Aluminium Casings
- 1 High-Power LED or LED Array Design
- Different Face Shapes and Finishes
- White, Blue, Green, Red or RGBW Multi-Color Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply



Simply
the brightest.



Color of lighting



W	■ warm white
D	■ daylight white
B	■ blue
G	■ green
R	■ red
M	■ ■ ■ ■ RGBW multi-color

Control

I	internal dimming control, 2-wire system
E	external dimming control, 3-wire system

INTENSA MRM0110

Power supply	12 – 24 Vdc, max. 130 mA
Lens angle	130°
Optical window	High Grade Polycarbonate Glass
Luminous flux	max. 150 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	max. Ø 58 x 25 mm
Mounting hole	Ø 48 mm x 24 mm
Weight	Aluminium front shape 70 g Stainless steel front shape 100 g



Front shape

MAW	round, modern, painted white aluminium
MAB	round, modern, painted beige aluminium
MSP	round, modern, polished stainless steel
MSG	round, modern, polished gold (PVD) stainless steel
MSS	round, modern, satin stainless steel
QMAW	square, modern, painted white aluminium
QMAB	square, modern, painted beige aluminium
QMSP	square, modern, polished stainless steel
QMSG	square, modern, polished gold (PVD) stainless steel
QMSS	square, modern, satin stainless steel

INTENSA


Compact LED light with electronic driver built-in waterproof anodized aluminium casing designed by using 1, 2 or 6 high-power LEDs with built-in microprocessor which enables network connections and remote control with digital dimming. Multi-color RGBW models offer the best illumination quality of different white lighting and microprocessorcontrolled changing of white and all other colors of lighting manually or automatically through the complete rainbow spectrum. The light is designed to adjust the requested white lighting in 21 steps. Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interface MXU01. Advanced optical system with reflector and holographic diffuser allows perfect light spread with different color temperature options for interior and exterior. Due to wide range of prestige massive face shapes made of aluminium or stainless steel the INTENSA is suitable to fit on both luxury yachts and superyachts. All models are designed for operating at extreme temperature and voltage conditions with thermal, transient and reverse polarity protections.

Features

- Innovative Design
- Anodized Aluminium Casings
- 1, 2 or 6 High-Power LEDs Design
- Different Face Shapes and Finishes
- White, Blue, Green, Red or RGBW Multi-Color Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation



Simply
the brightest.



INTENSA MRM0115

Power Supply	12-24 Vdc, max. 250 mA/12 Vdc or 125 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 270 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 79 mm x 26 mm (C) or Ø 79 mm x 23 mm (M)
Mounting hole	Ø 68 mm x 20 mm (C) or Ø 68 mm x 22 mm (M)
Weight	Aluminium front shape 145 g (C) or 125 g (M) Stainless steel front shape 225 g (C) or 160 g (M)



INTENSA MRM0220

Power supply	12-24 Vdc, max. 400 mA/12 Vdc or 200 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 450 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 79 mm x 26 mm (C) or Ø 79 mm x 23 mm (M)
Mounting hole	Ø 68 mm x 20 mm (C) or Ø 68 mm x 22 mm (M)
Weight	Aluminium front shape 145 g (C) or 125 g (M) Stainless steel front shape 225 g (C) or 160 g (M)



INTENSA MRM0620

Power supply	12-24 Vdc, max 650 mA/12 Vdc or 350 mA/24 Vdc
Reflector angle	120°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 550 lm
White color temperature	Adjustable, from 2500 K to 7500 K in 21 steps
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 79 mm x 37 mm (C) or Ø 79 mm x 34 mm (M)
Mounting hole	Ø 68 mm x 31 mm (C) or Ø 68 mm x 33 mm (M)
Weight	Aluminium front shape 145 g (C) or 125 g (M) Stainless steel front shape 225 g (C) or 160 g (M)

Color of lighting

INTENSA MRM0115 and MRM0220

W	■ warm white
D	■ daylight white
B	■ blue
G	■ green
R	■ red

INTENSA MRM0620










M	■ ■ ■ ■ RGBW multi-color
---	--------------------------

Control

I	internal dimming control, 2-wire system
E	external dimming control, 3-wire system

Front shape

CAW	round, classic, painted white aluminium
CAB	round, classic, painted beige aluminium
CSP	round, classic, polished stainless steel
CSG	round, classic, polished gold (PVD) stainless steel
CSS	round, classic, satin stainless steel
MAW	round, modern, painted white aluminium
MAB	round, modern, painted beige aluminium
MSP	round, modern, polished stainless steel
MSG	round, modern, polished gold (PVD) stainless steel
MSS	round, modern, satin stainless steel
QMAW	square, modern, painted white aluminium
QMAB	square, modern, painted beige aluminium
QMSP	square, modern, polished stainless steel
QMSG	square, modern, polished gold (PVD) stainless steel
QMSS	square, modern, satin stainless steel



INTENSA

Compact LED light with electronic driver built-in waterproof anodized aluminium casing designed by using 2, 3 or 6 high-power LEDs with built-in microprocessor which enables network connections and remote control with digital dimming.

Multi-color RGBW models offer the best illumination quality of different white lighting and microprocessorcontrolled changing of white and all other colors of lighting manually or automatically through the complete rainbow spectrum. The light is designed to adjust the requested white lighting in 21 steps.

Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interface MXU01.

Advanced optical system with reflector and holographic diffuser allows perfect light spread with different color temperature options for interior and exterior.

Due to wide range of prestige massive face shapes made of aluminium or stainless steel the INTENSA is suitable to fit on both luxury yachts and superyachts.

All models are designed for operating at extreme temperature and voltage conditions with thermal, transient and reverse polarity protections.

Features

- Innovative Design
- Anodized Aluminium Casings
- 2, 3 or 6 High-Power LEDs Design
- Different Face Shapes and Finishes
- White, Blue, Green, Red or RGBW Multi-Color Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation



Simply
the brightest.



Color of lighting

INTENSA MRM0230 and MRM0340

W	■ warm white
D	■ daylight white
B	■ blue
G	■ green
R	■ red

INTENSA MRM0380

W	■ warm white
D	■ daylight white

INTENSA MRM0625



M	■ ■ ■ ■ RGBW multi-color
---	--------------------------

Control

I	internal dimming control, 2-wire system
E	external dimming control, 3-wire system



INTENSA MRM0230

Power supply	12–24 Vdc, max. 500 mA/12 Vdc or 260 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 530 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 105 mm x 30 mm
Mounting hole	Ø 79 mm x 29 mm
Weight	Aluminium front shape 190 g Stainless steel front shape 250 g





INTENSA MRM0340

Power supply	12–24 Vdc, max. 800 mA/12 Vdc or 420 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 800 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 105 mm x 30 mm
Mounting hole	Ø 79 mm x 29 mm
Weight	Aluminium front shape 190 g Stainless steel front shape 250 g





INTENSA MRM0380

Power supply	12–24 Vdc, max. 800 mA/12 Vdc or 420 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 1300 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 105 mm x 30 mm
Mounting hole	Ø 79 mm x 29 mm
Weight	Aluminium front shape 190 g Stainless steel front shape 250 g



INTENSA MRM0625

Power supply	12–24 Vdc, max. 650 mA/12 Vdc or 350 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 550 lm
White color temperature	Adjustable, from 2500 K to 7500 K in 21 steps
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 105 mm x 30 mm
Mounting hole	Ø 79 mm x 29 mm
Weight	Aluminium front shape 190 g Stainless steel front shape 250 g



Front shape

MAW	round, modern, painted white aluminium	QMAW	square, modern, painted white aluminium
MAB	round, modern, painted beige aluminium	QMAB	square, modern, painted beige aluminium
MSP	round, modern, polished stainless steel	QMSP	square, modern, polished stainless steel
MSG	round, modern, polished gold (PVD) stainless steel	QMSG	square, modern, polished gold (PVD) stainless steel
MSS	round, modern, satin stainless steel	QMSS	square, modern, satin stainless steel

ASTRA

Compact LED light designed with 1, 3 or 6 high-power LEDs with electronic driver built-in waterproof anodized aluminium casing for surface mounting. Innovative electronic design with built-in microprocessor enables network connections and remote control with digital dimming. Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interface MXU01. Advanced optical system with reflector and holographic diffuser allows perfect light spread. Different color temperature options offer perfect solutions in the interior and exterior. Due to wide range of prestige massive face shapes made of alluminium or stainless steel the ASTRA is suitable to fit on luxury yachts and superyachts. All models are designed for operating at extreme temperature and voltage conditions with thermal, transient and reverse polarity protections.


Features

- 1, 3 or 6 High-Power LEDs Design
- Anodized Aluminium Casings
- Massive Face Shapes with Different Finishes
- Innovative Snap-on Lid Fastening Method
- White, Blue, Green or Red Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation

Simply
the brightest.


ASTRA MSM0115

Power supply	12–24 Vdc, max. 300 mA/12 Vdc or 155 mA/24 Vdc
Reflector angle	100°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 270 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 88 mm x 12 mm
Weight	Aluminium front shape 17 g Stainless steel front shape 260 g




ASTRA MSM0320

Power supply	12–24 Vdc, max. 330 mA/12 Vdc or 185 mA/24 Vdc
Reflector angle	100°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 430 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 88 mm x 12 mm
Weight	Aluminium front shape 170 g Stainless steel front shape 260 g



ASTRA MSM0650

Power supply	12–24 Vdc, max. 600 mA/12 Vdc or 315 mA/24 Vdc
Reflector angle	100°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 870 lm (daylight white)
White color temperature	4500 K (daylight) or 3000 K (warm)
Casing	Black anodized aluminium
Protection	IP 65
Dimensions	Ø 108 mm x 12 mm
Weight	Aluminium front shape 250 g Stainless steel front shape 350 g



Color of lighting

W	■ warm white
D	■ daylight white
B	■ blue
G	■ green
R	■ red

Front shape

AW	painted white aluminium
AB	painted beige aluminium
SP	polished stainless steel
SG	polished gold (PVD) stainless steel
SS	satın stainless steel

Control

I	internal dimming control, 2-wire system
E	external dimming control, 3-wire system

ASTRA

Compact LED light with electronic driver built-in anodized aluminium casing designed by using 2, 3 or 6 high-power LEDs with built-in microprocessor which enables network connections and remote control with digital dimming. Multi-color RGBW model offer the best illumination quality of different white lighting and microprocessor-controlled changing of white and all other colors of lighting manually or automatically through the complete rainbow spectrum. The light is designed to adjust the requested white lighting in 21 steps. Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interfaces MXU01. Advanced optical system with reflector and holographic diffuser allows perfect light spread with different color temperature options for interior and exterior. Due to massive face shape made of aluminium or stainless steel with innovative snap-on fastening method the ASTRA is suitable to fit on both luxury yachts and superyachts. All models are designed for operating at extreme temperature and voltage conditions with thermal, transient and reverse polarity protections.

Features

- Innovative Design
- Anodized Aluminium Casings
- 2, 3 or 6 High-Power LEDs Design
- Massive Face Shape with Different Finishes
- Innovative Snap-on Lid Fastening Method
- Warm White, Daylight White, Blue, Green, Red or RGBW Multi-Color Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation

Simply
the brightest.



Color of lighting

ASTRA MRM0230 and MRM0340

W	■ warm white
D	■ daylight white
B	■ blue
G	■ green
R	■ red

ASTRA MRM0380

W	■ warm white
D	■ daylight white

ASTRA MRM0625

M	■ ■ ■ ■ RGBW multi-color
---	--------------------------

Control

I	internal dimming control, 2-wire system
E	external dimming control, 3-wire system

ASTRA MRM0230

Power supply	12–24 Vdc, max. 500 mA/12 Vdc or 260 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 530 lm (daylight white)
White color temperature	4500K (daylight) or 3000K (warm)
Casing	Black anodized aluminium
Protection	IP65
Dimensions	Ø 108mm x 32mm
Mounting hole	Ø 61mm x 22mm
Weight	Aluminium front shape 240g Stainless steel front shape 300g

ASTRA MRM0340

Power supply	12–24 Vdc, max. 800 mA/12 Vdc or 420 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 800 lm (daylight white)
White color temperature	4500K (daylight) or 3000K (warm)
Casing	Black anodized aluminium
Protection	IP65
Dimensions	Ø 108mm x 32mm
Mounting hole	Ø 61mm x 22mm
Weight	Aluminium front shape 240g Stainless steel front shape 300g

ASTRA MRM0380


Power supply	12–24 Vdc, max. 800 mA/12 Vdc or 420 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 1.300 lm (daylight white)
White color temperature	4500K (daylight) or 3000K (warm) - white only
Casing	Black anodized aluminium
Protection	IP65
Dimensions	Ø 108mm x 32mm
Mounting hole	Ø 61mm x 22mm
Weight	Aluminium front shape 240g Stainless steel front shape 300g

ASTRA MRM0625

Power supply	12–24 Vdc, max. 650 mA/12 Vdc or 350 mA/24 Vdc
Reflector angle	130°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 550 lm
White color temperature	Adjustable, from 2500K to 7500K in 21 steps
Casing	Black anodized aluminium
Protection	IP65
Dimensions	Ø 108mm x 32mm
Mounting hole	Ø 61mm x 22mm
Weight	Aluminium front shape 240g Stainless steel front shape 300g

Front shape

AW	painted white aluminium
AB	painted beige aluminium
SP	polished stainless steel
SG	polished gold (PVD) stainless steel
SS	satin stainless steel



ARCUS

Innovative multi-color RGB LED interior & exterior light built-in waterproof stainless steel casing with different front shapes. It is suitable for using as interior and exterior downlight and step or staircase light to light to the floor under the angle of 45 degrees or straight.

The main feature is that ARCUS series allows changing of the color of lighting manually or automatically through the complete rainbow spectrum.

The most advanced electronic design with built-in microprocessor enables network connection and simple control of complete group of the lights.

Built-in ASTEL protocol enables complete lighting control by using optional DMX512 interface MXU01.

All the models are available in polished stainless steel casings with multi-color RGB or WGB lighting with 1 high-brightness LED.

Features


- Innovative Design
- Stainless Steel Casings
- Different Face Shapes
- Multi-Color RGB Lighting
- Reflector with Holographic Diffuser
- Microprocessor Control
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation



Simply
the brightest.

ARCUS MRM01

Power supply	12-24 Vdc, max. 32 mA/12 Vdc or 18 mA/24 Vdc
Lens angle	60° (angular lighting) or 90° (straight lighting)
Optical window	High-grade polycarbonate glass
Luminous flux	max. 9 lm
Lighting color	RGB spectrum
Operating temperature	-10°C - +50°C
Casing	Stainless steel (SAE316L)
Protection	IP 68
Dimensions	Ø 40 mm x 26mm (slope front shape) Ø 50 mm x 26mm (gentle front shape) Ø 30 mm x 43mm (rail-mount model)
Mounting hole	21 mm (not for rail-mount model)
Weight	75 g (slope front shape) 95 g (gentle front shape) 150 g (rail-mount model)

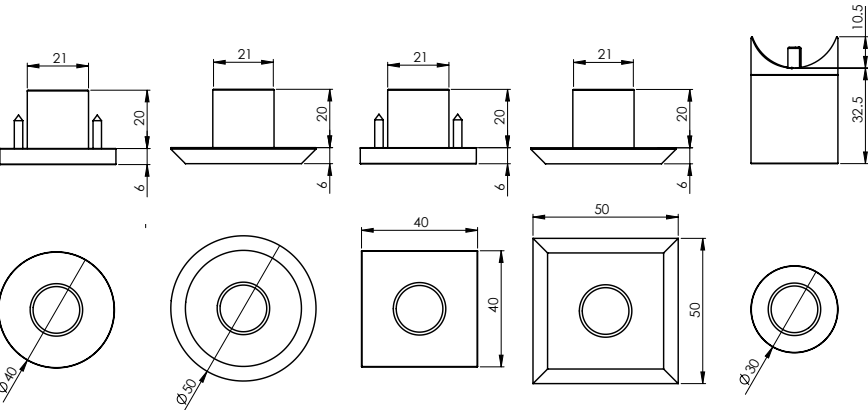

Color of lighting

M RGB multi-color

Direction of lighting

S straight
A angular (not for rail-mount model)

Front shape

S round slope
G round gentle
QS square slope
QG square gentle
R rail-mount



SPEIRA
SPEIRA MQWAVE01

LAENA
LAENA MQMURO01

Superyacht Interior LED Lights

SPEIRA

Interior LED light SPEIRA with Direct-Drive LED mains power supply designed with advanced optical holographic propagation technology which allows perfect light spreading and the best illumination quality with three different white color temperature options.

The translucent natural stone veneer screen allows perfect light spreading to achieve unique appearance of the interior floor light and surroundings.

Built-in microprocessor enables network connections and remote control with digital dimming.

Built-in ASTEL protocol enables complete DMX512 lighting control by using of optional interfaces.

All models are designed for operating at normal temperature conditions with thermal, transient and reverse polarity protections.

Features

- Anodized Aluminium / Steel Casings
- Sand-Blasting and Anodizing E6C0 Finishing / Painting
- Warm, Daylight or Cool White Lighting
- High Grade Polycarbonate Glass Optical Window
- Reflector with Holographic Diffuser
- Translucent Natural Stone Veneer Screen
- AC Direct-Drive LED Mains Power Supply
- Flicker-Free Triac and Phase Dimming
- Built-in ASTEL Protocol for DMX512 Control*
- AC Power Line Surge Protection
- Low Power Consumption
- Simple Installation



SPEIRA MQWAVE01

Power supply	230 Vac / 90 mA max.
Optical window	High Grade Polycarbonate Glass
Color Rendering Index (CRI)	80 - 90
Luminous flux	max. 1.521 lm (cool white)
ASTEL protocol default address	1
Casing	Anodized Aluminium / Steel
Operating temperature	-10°C - +40°C
Dimensions (panel)	Ø 34 x 125 cm
Weight	12 kg

Type of screen

SF - Natural Stone Veneer - 'Falling Leaves'



SR - Natural Stone Veneer - 'Rustique'



Color of lighting

WW	■ warm white
DW	■ daylight white
CW	■ cool white

Control

T	Dimming (triac)
I	Switch dimming
E	Switch dimming

LAENA

Interior LED light LAENA with Direct-Drive LED mains power supply designed with advanced optical holographic propagation technology which allows perfect light spreading and the best illumination quality with three different white color temperature options.

The translucent natural stone veneer screen allows perfect light spreading to achieve unique appearance of the interior wall/ceiling light and surroundings.

Built-in microprocessor enables network connections and remote control with digital dimming.

Built-in ASTEL protocol enables complete DMX512 lighting control by using of optional interfaces.

All models are designed for operating at normal temperature conditions with thermal, transient and reverse polarity protections.

Features

- Anodized Aluminium / Steel Casings
- Sand-Blasting and Anodizing E6C0 Finishing / Painting
- Warm, Daylight or Cool White Lighting
- High Grade Polycarbonate Glass Glass Optical Window
- Reflector with Holographic Diffuser
- Translucent Natural Stone Veneer Screen
- AC Direct-Drive LED Mains Power Supply
- Flicker-Free Triac and Phase Dimming
- Built-in ASTEL Protocol for DMX512 Control*
- AC Power Line Surge Protection
- Low Power Consumption
- Simple Installation



Simply
the brightest.



Color of lighting

WW	■ warm white
DW	■ daylight white
CW	■ cool white

Control

T	Dimming (triac)
I	Switch dimming
E	Switch dimming

LAENA MQMURO01

Power supply	230 Vac / 90 mA max.
Optical window	High Grade Polycarbonate Glass
Color Rendering Index (CRI)	80 - 90
Luminous flux	max. 1.521 lm (cool white)
ASTEL protocol default address	1
Casing	Anodized Aluminium / Steel
Operating temperature	-10°C - +40°C
Dimensions (panel)	30 x 21.5 x 19.5 mm
Weight	1 kg

Type of screen

SF - Natural Stone Veneer - 'Falling Leaves'



SR - Natural Stone Veneer - 'Rustique'





EQUATOR

EQUATOR MSR0640
EQUATOR MSR1280
EQUATOR MSR36240

CONUS

CONUS MST0680
CONUS MST18240
CONUS MSR0680
CONUS MSR18240

CONVEX

CONVEX MST0680
CONVEX MST18240
CONVEX MSR0680
CONVEX MSR18240

PLAQUE

PLAQUE MFM0680
PLAQUE MFM18240

Underwater LED Lights

EQUATOR

Ultra-thin compact surface-mount design with built-in driver enables very simple installation on the stern and both sides of the hull without making any bigger holes through the hull under waterline. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol. Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features


- Innovative and Patented Design
- Aluminium Bronze or Stainless Steel Ultra-Thin Casing
- 6 Power LEDs Design
- White, Blue, WB Dual-Color or RGBW Multi-Color Lighting
- High Grade Polycarbonate Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation



The thinnest
surface-mount
underwater lights.

EQUATOR MSR0640

Power supply	12–24 Vdc, max. 1.35 A/12 Vdc or 670 mA/24 Vdc
Lens angle	60°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 2.300 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or stainless steel (SAE316L)
Protection	IP 68
Dimensions	99 x 69 x 10 mm
Weight	0.3 kg

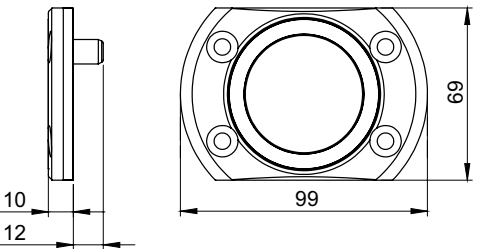

Color of lighting

W	white
B	blue
WB	WB dual-color
MW	RGBW multi-color

Material of casing

AB2	aluminium bronze
SSP	stainless steel

**NEW GENERATION.
ELEVATED PERFORMANCE.**
Up to 2.300 lm


PATENTED

EQUATOR

Ultra-thin compact surface-mount design with built-in driver enables very simple installation on the stern and both sides of the hull without making any bigger holes through the hull under waterline. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol. Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features

- Innovative and Patented Design
- Aluminium Bronze or Stainless Steel Ultra-Thin Casing
- 12 Power LEDs Design
- White, Blue, WB Dual-Color or RGBW Multi-Color Lighting
- High Grade Polycarbonate Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation

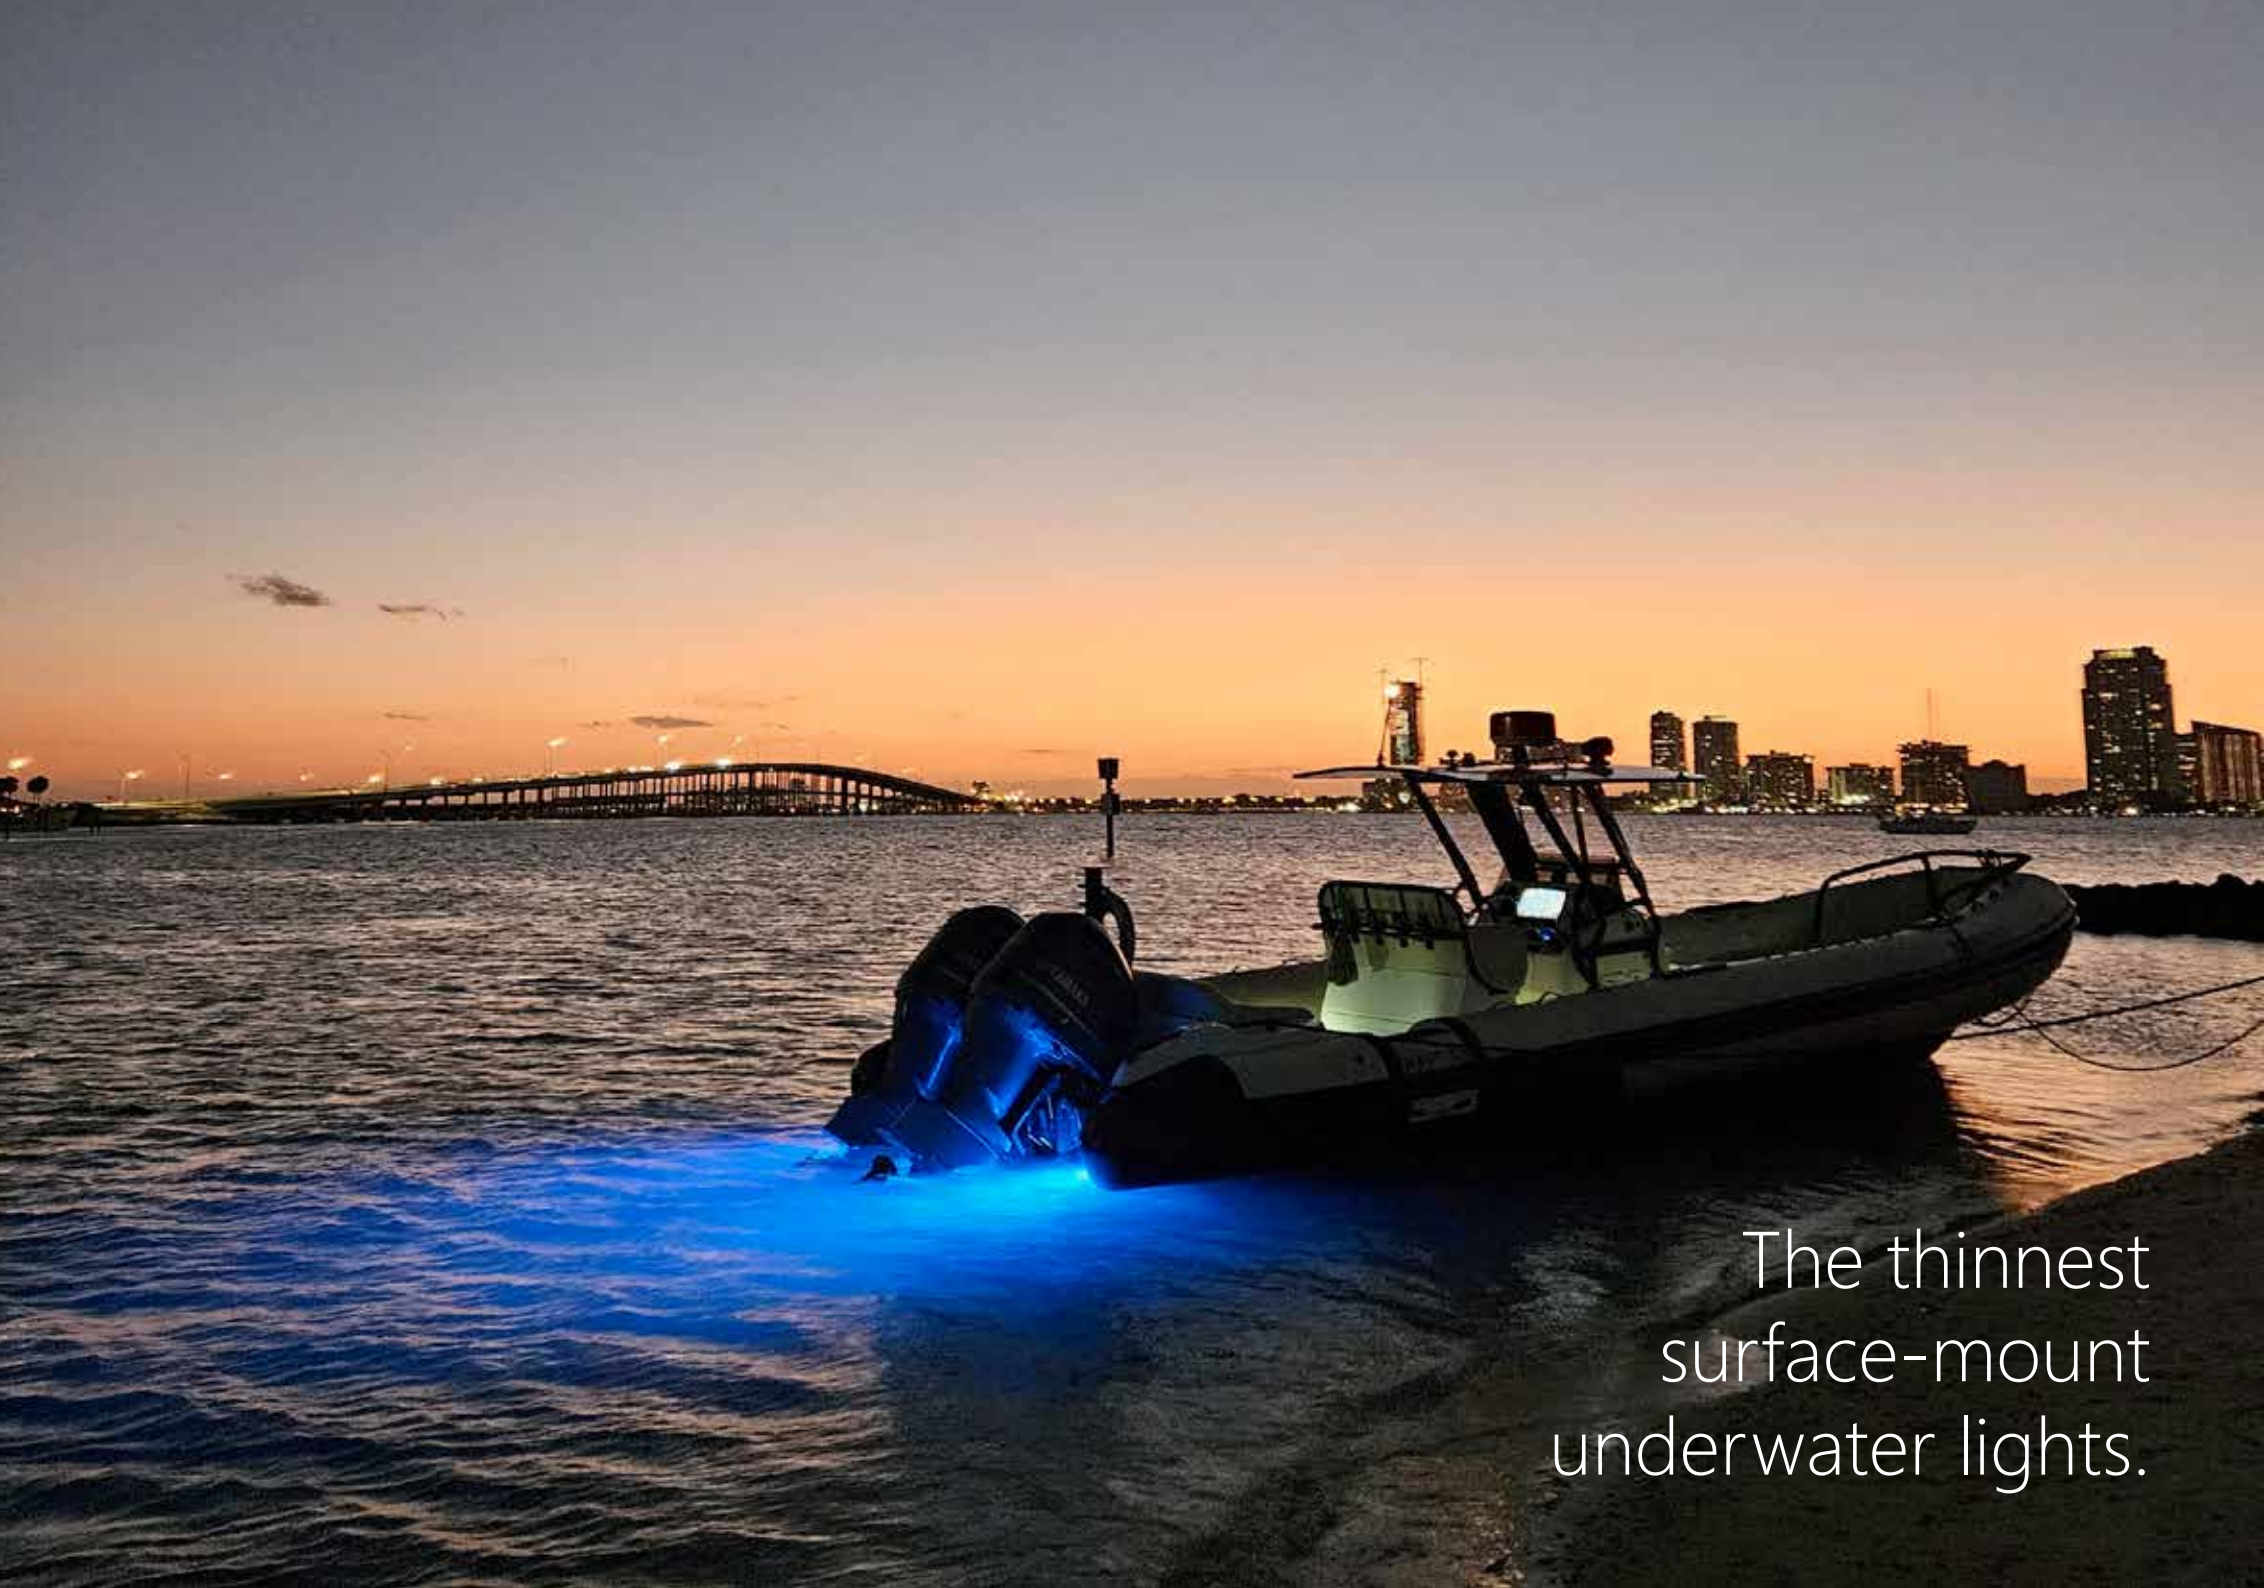


The thinnest
surface-mount
underwater lights.



EQUATOR MSR1280

Power supply	12–24 Vdc, max. 2.7 A/12 Vdc or 1.2 A/24 Vdc
Lens angle	60°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 4.600 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or stainless steel (SAE316L)
Protection	IP 68
Dimensions	119 x 89 x 10 mm
Weight	0.4 kg

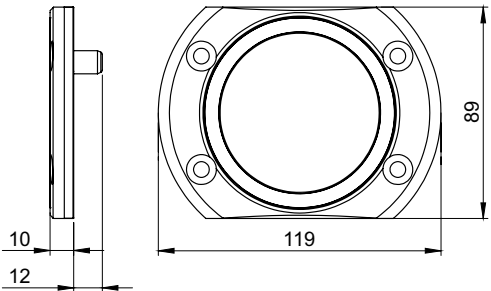

Color of lighting

W	white
B	blue
WB	WB dual-color
MW	RGBW multi-color

Material of casing

AB2	aluminium bronze
SSP	stainless steel

NEW GENERATION.
ELEVATED PERFORMANCE.
Up to 4.600 lm

PATENTED

EQUATOR

Ultra-thin compact surface-mount design with built-in driver enables very simple installation on the stern and both sides of the hull without making any bigger holes through the hull under waterline. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol. Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features

- Innovative and Patented Design
- Aluminium Bronze or Stainless Steel Ultra-Thin Casing
- 36 Power LEDs Design
- White, Blue, WB Dual-Color or RGBW Multi-Color Lighting
- High Grade Polycarbonate Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Wide Range Power Supply
- Low Power Consumption
- Simple Installation




The thinnest
surface-mount
underwater lights.



EQUATOR MSR36240

Power supply	12-24 Vdc, max. 6.4 A/12 Vdc or 2.6 A/24 Vdc
Lens angle	60°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or stainless steel (SAE316L)
Protection	IP 68
Dimensions	139 x 109 x 10 mm
Weight	0.6 kg

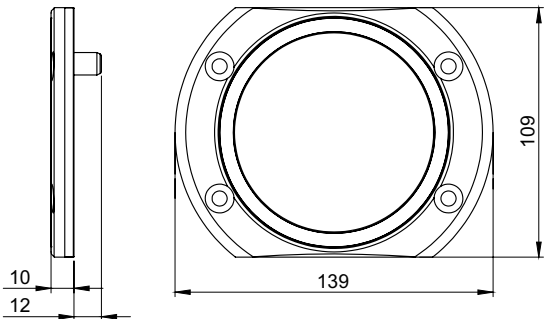

Color of lighting

W	white
B	blue
WB	WB dual-color
MW	RGBW multi-color

Material of casing

AB2	aluminium bronze
SSP	stainless steel

**NEW GENERATION.
ELEVATED PERFORMANCE.**
Up to 10.700 lm

PATENTED

CONUS

Registered slope-truncated cone designed casing for installation on the hull to light in different directions to the sea ground and to the both sides of the yacht.

Surface-mount designed casing enables very simple installation on the hull without making any bigger holes through the hull under water line.

Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Multi-color RGB or WGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze or Anodized Aluminium Casing
- 6 or 18 High-Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Remote Control
- Digital Dimming (optional)
- DMX512 Network Control (optional)



Simply
the brightest.



Color of lighting

W	white
B	blue
G	green

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium



Color of lighting


W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium


CONUS MST0680

Power requirement	1 A / 1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 3.500 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	160 x 103 x 64 mm
Weight	2.4 kg (bronze) / 0.9 kg (aluminium)




Power Supply Unit MPS021000/MPS021500

Input voltage	24 Vdc
Consumption	max. 1.7 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	127 x 111 x 55.5 mm
Weight	0.3 kg




CONUS MST18240

Power requirement	3x1 A / 3x1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	217 x 142 x 85 mm
Weight	6.0 kg (bronze) / 2.3 kg (aluminium)



Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption max.	5 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg



CONUS

Registered slope-truncated cone designed casing for installation on the hull to light in different directions to the sea ground and to the both sides of the yacht.

Surface-mount designed casing enables very simple installation on the hull without making any bigger holes through the hull under water line.

Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Multi-color RGB or WGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze or Anodized Aluminium Casing
- 6 or 18 High-Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Remote Control
- Digital Dimming (optional)
- DMX512 Network Control (optional)



Simply
the brightest.



Color of lighting

W	white
B	blue
G	green

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium



Color of lighting

W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

Material of casing



AB2	aluminium bronze
ALN	anodized aluminium

CONUS MSR0680

Power requirement	1 A / 1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 3.500 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	160 x 103 x 85 mm
Weight	2.4 kg (bronze) / 0.9 kg (aluminium)

Power Supply Unit MPS021000/MPS021500

Input voltage	24 Vdc
Consumption	max. 1.7 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	127 x 111 x 55.5 mm
Weight	0.3 kg





CONUS MSR18240

Power requirement	3x1 A / 3x1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	217 x 142 x 106 mm
Weight	6.0 kg (bronze) / 2.3 kg (aluminium)

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption max.	5 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg



CONVEX


Truncated cone surface-mount designed casing enables very simple installation on the hull without making any bigger holes through the hull under water line.
Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.
Multi-color RGB or WGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze or Anodized Aluminium Casing
- 6 or 18 High-Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Remote Control
- Digital Dimming (optional)
- DMX512 Network Control (optional)



Simply
the brightest.



Color of lighting

W	white
B	blue
G	green

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium



Color of lighting

W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

Material of casing



AB2	aluminium bronze
ALN	anodized aluminium

CONVEX MST0680

Power requirement	1 A / 1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 3.500 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	Ø 136 x 34 mm
Weight	2.0 kg (bronze) / 0.8 kg (aluminium)

Power Supply Unit MPS021000/MPS021500

Input voltage	24 Vdc
Consumption	max. 1.7 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	127 x 111 x 55.5 mm
Weight	0.3 kg





CONVEX MST18240

Power requirement	3x1 A / 3x1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	Ø 166 x 34 mm
Weight	2.7 kg (bronze) / 1.1 kg (aluminium)

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg



CONVEX

Truncated cone surface-mount designed casing enables very simple installation on the hull without making any bigger holes through the hull under water line.
Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.
Multi-color RGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze or Anodized Aluminium Casing
- 6 or 18 High-Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Remote Control
- Digital Dimming (optional)
- DMX512 Network Control (optional)



Simply
the brightest.



Color of lighting

W	white
B	blue
G	green

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium



Color of lighting


W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

Material of casing

AB2	aluminium bronze
ALN	anodized aluminium



CONVEX MSR0680

Power requirement	1 A / 1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 3.500 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	Ø 136 x 34 mm
Weight	2.0 kg (bronze) / 0.8 kg (aluminium)




Power Supply Unit MPS021000/MPS021500

Input voltage	24 Vdc
Consumption	max. 1.7 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	127 x 111 x 55.5 mm
Weight	0.3 kg





CONVEX MSR18240

Power requirement	3x1 A / 3x1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Aluminium bronze (AB2) or anodized aluminium
Protection	IP 68
Dimensions	Ø 166 x 34 mm
Weight	2.7 kg (bronze) / 1.1 kg (aluminium)



Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg



PLAQUE

The underwater light designed to use the latest LED lighting technology for flush-mount installation where the most important is low-profile casing to avoid high water resistance and quality materials to assure very reliability installation and operation.

Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Multi-color RGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze Casing
- 6 or 18 High-Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Remote Control
- Digital Dimming (optional)
- DMX512 Network Control (optional)



Simply
the brightest.



Color of lighting


W	white
B	blue
G	green

Material of casing

AB2	aluminium bronze
-----	------------------


PLAQUE MFM0680

Power requirement	1 A / 1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 3.500 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - + 50°C
Casing	Aluminium bronze (AB2)
Protection	IP 68
Dimensions	Ø 110 x 135 mm
Weight	2.3 kg

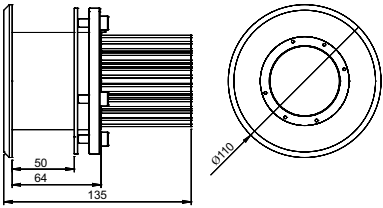

Power Supply Unit MPS021000/MPS021500

Input voltage	24 Vdc
Consumption	max. 1.7 Adc
Operating temperature	-10°C - + 50°C
Casing	ABS
Protection	IP 65
Dimensions	127 x 111 x 55.5 mm
Weight	0.3 kg



Color of lighting


W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

Material of casing

AB2	aluminium bronze
-----	------------------


PLAQUE MFM18240

Power requirement	3x1 A / 3x1.5 A
Lens angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - + 50°C
Casing	Aluminium bronze (AB2)
Protection	IP 68
Dimensions	Ø 140 x 190 mm
Weight	6.7 kg

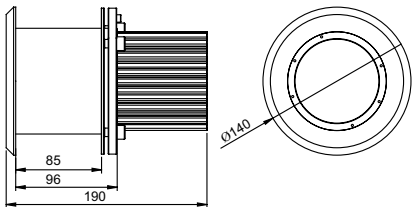

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C - + 50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg





EQUATOR

EQUATOR MSR36240P
EQUATOR MSR36240S

CONVEX

CONVEX MTH18240S
CONVEX MSR18240S
CONVEX MSR09200
CONVEX MSR18300

PLAQUE

PLAQUE MFM18240S
PLAQUE MFM09200
PLAQUE MFM18300

Superyacht Underwater LED Lights

EQUATOR

Ultra-thin compact design with built-in driver for surface-mount installation.
Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol
Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features

- Innovative Design
- Stainless Steel Ultra-thin Casing
- 36 Power LEDs Design
- White, Blue, WB Dual-Color or RGBW Multi-Color Lighting
- High Grade Polycarbonate Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption

WB DUAL-COLOR RGBW MULTI-COLOR



Simply
the brightest.




Color of lighting

W	white
B	blue
WB	WB dual-color
MW	RGBW multi-color

EQUATOR MSR36240P

Power supply	24 Vdc, max. 2.6 A
Lens angle	60°
Optical window	High-grade polycarbonate glass
Luminous flux max.	10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Stainless steel (SAE316L)
Protection	IP 68
Dimensions	Ø 166 x 15 mm
Weight	1.7 kg

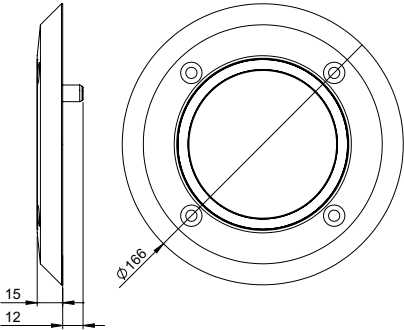


Color of lighting

W	white
B	blue
WB	WB dual-color
MW	RGBW multi-color

EQUATOR MSR36240S

Power supply	24 Vdc, max. 2.6 A
Lens angle	60°
Optical window	High-grade polycarbonate glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C - +50°C
Casing	Stainless steel (SAE316L)
Protection	IP 68
Dimensions	Ø 139 x 15 mm
Weight	1.4 kg



NEW GENERATION.
ELEVATED PERFORMANCE.
Up to 10.700 lm

CONVEX

Robust design with separate power supply unit (driver) for installation with optional cofferdam. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol

Multi-color RGB or WGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Innovative Design
- Stainless Steel Casing
- 18 Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption



Simply
the brightest.




Color of lighting

W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

CONVEX MTH18240S

Power requirement	3 x 1 A / 3×1.5 A
Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Stainless Steel (SAE316L)
Protection	IP 68
Dimensions	Ø 110 x 125 mm
Weight	1.9 kg

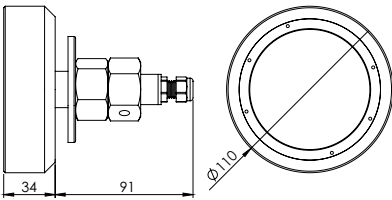

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg




Color of lighting

W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

CONVEX MSR18240S

Power requirement	3 x 1 A / 3×1.5 A
Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Stainless Steel (SAE316L)
Protection	IP 68
Dimensions	Ø 140 x 34 mm
Weight	2.3 kg

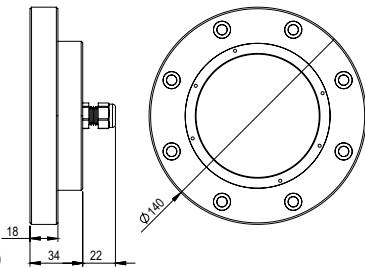

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg

CONVEX

Professional robust design with separate power supply unit (driver) for installation with optional welded cofferdam.
White-color light control by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.
Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features

- Innovative Design
- Stainless Steel Ultra-Thin Casing
- 9 or 18 High-Power LEDs Design
- White or RGBW Multi-Color Lighting
- Tempered Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection



Simply
the brightest.




Color of lighting

W	white
MW	RGBW multi-color

CONVEX MSR09200

Power requirement	1A (white), 3 x 1 A (RGB)
Lens Angle	50°
Optical window	15 mm tempered glass
Luminous flux	max. 14.000 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Stainless Steel (SAE316L) or aluminium
Protection	IP 68
Dimensions	Ø 192 x 54 mm
Weight	6.2 kg (stainless steel), 2.5 kg (aluminium)



Power Supply Unit MPS91000

Input voltage	120-277 Vac, 50/60 Hz
Consumption	120W (white), 100W (RGB)
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 56
Dimensions	300 x 220 x 120 mm
Weight	3 kg (white), 4 kg (RGB)




Color of lighting

W	white
MW	RGBW multi-color

CONVEX MSR18300

Power requirement	2 x 1A (white), 3 x 1 A (RGB)
Lens Angle	50°
Optical window	15 mm tempered glass
Luminous flux	max. 28.000 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Stainless Steel (SAE316L) or aluminium
Protection	IP 68
Dimensions	Ø 242 x 54 mm
Weight	9.4 kg (stainless steel), 3.7 kg (aluminium)



Power Supply Unit MPS181000

Input voltage	120-277 Vac, 50/60 Hz
Consumption	240W (white), 200W (RGB)
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 56
Dimensions	380 x 300 x 120 mm
Weight	4 kg (white), 5 kg (RGB)

PLAQUE

Robust design with separate power supply unit (driver) for installation with optional cofferdam. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol
Multi-color RGB or WGB light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Innovative Design
- Stainless Steel Casing
- 18 Power LEDs Design
- White, Blue, Green, RGB or WGB Multi-Color Lighting
- Tempered Glass Optical Window
- High-Efficiency Lens
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption



Simply
the brightest.




Color of lighting

W	white
B	blue
G	green
M	RGB multi-color
T	WGB multi-color

PLAQUE MFM18240S

Power requirement	3 x 1 A / 3×1.5 A
Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 10.700 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium
Protection	IP 68
Dimensions	Ø 155 x 173 mm (without cofferdam)
Weight	3.6 kg (without cofferdam)

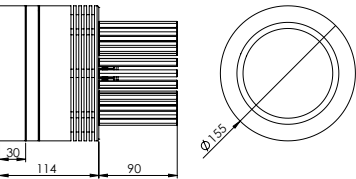

Power Supply Unit MPS061000 / MPS061500

Input voltage	24 Vdc
Consumption	max. 5 Adc
Operating temperature	-10°C – +50°C
Casing	ABS
Protection	IP 65
Dimensions	200 x 160 x 55.5 mm
Weight	0.6 kg

PLAQUE

Professional robust design with separate power supply unit (driver) for installation with corresponding cofferdam which enables reliable management from the inside of the hull. White-color light control by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol. Multi-color RGBW light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch or optional DMX512 interface MXU01 with built-in ASTEL protocol.

Features

- Innovative Design
- High-Grade Aluminium or Stainless Steel
- Cofferdam with Aluminium Light Body
- 9 or 18 High-Power LEDs Design
- White or RGBW Multi-Color Lighting
- Tempered Glass Optical Window
- Vacuum Metalized Reflector
- Remote Control
- Digital Dimming
- DMX512 Network Control
- Polarity Protection
- Transient Protection
- Thermal Protection



Simply
the brightest.




Color of lighting

W	white
MW	RGBW multi-color

PLAQUE MFM09200

Power requirement	1A (white), 3 x 1 A (RGB)
Lens Angle	50°
Optical window	15 mm tempered glass
Luminous flux	max. 14.000 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium
Protection	IP 68
Dimensions	Ø 190 x 170 mm (without cofferdam)
Weight	4.8 kg (without cofferdam)

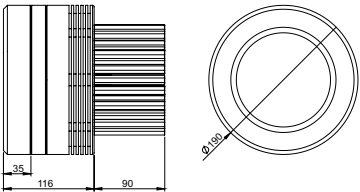

Power Supply Unit MPS91000

Input voltage	120-277 Vac, 50/60 Hz
Consumption	120W (white), 100W (RGB)
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 56
Dimensions	300 x 220 x 120 mm
Weight	3 kg (white), 4 kg (RGB)




Color of lighting

W	white
MW	RGBW multi-color

PLAQUE MFM18300

Power requirement	2 x 1A (white), 3 x 1 A (RGB)
Lens Angle	50°
Optical window	15 mm tempered glass
Luminous flux	max. 28.000 lm (white)
White color temperature	6.000 - 10.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium
Protection	IP 68
Dimensions	Ø 230 x 170 mm (without cofferdam)
Weight	7.1 kg (without cofferdam)

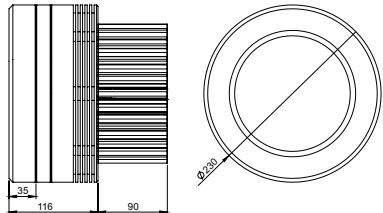

Power Supply Unit MPS181000

Input voltage	120-277 Vac, 50/60 Hz
Consumption	240W (white), 200W (RGB)
Operating temperature	-10°C – +55°C
Casing	ABS
Protection	IP 56
Dimensions	380 x 300 x 120 mm
Weight	4 kg (white), 5 kg (RGB)



CONVEX

CONVEX MSR0680 AB2WD
CONVEX MSR18240 AB2WD
CONVEX MST0680 AB2WD
CONVEX MST18240 AB2WD

EQUATOR

EQUATOR MSR0640
EQUATOR MSR1280
EQUATOR MSR36240

Underwater LED Dock Lights

CONVEX

Truncated cone surface-mount designed casings with rear cable enable very simple installations to the piers, floating pontoons and docks. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze Casing
- 6 or 18 High-Power LEDs Design
- Cool White Lighting
- Tempered Glass Optical Window
- Wide Range Power Supply 100-240 Vac
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Digital Dimming (optional)
- DMX512 Network Control (optional)


Marina Punat
Krk Island, Croatia, Europe

Simply
the brightest.




CONVEX MSR0680 AB2WD

Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 6.200 lm
White color temperature	6.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium Bronze (AB2)
Protection	IP 68
Dimensions	Ø 136 x 34 mm
Weight	2.0 kg




Power Supply Unit NPF-60D-24

Input voltage	100-240 Vac, 50/60 Hz
Consumption max.	60 W
Operating temperature	-40°C – +85°C
Casing	Plastic
Protection	IP 67
Dimensions	150 x 53 x 35 mm
Weight	0.5 kg



CONVEX MSR18240 AB2WD

Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 16.000 lm
White color temperature	6.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium Bronze (AB2)
Protection	IP 68
Dimensions	Ø 166 x 34 mm
Weight	2.7 kg



Power Supply Unit ELG-150-C2100B

Input voltage	100-240 Vac, 50/60 Hz
Consumption	max. 140W
Operating temperature	-10°C – +55°C
Casing	Aluminium
Protection	IP 67
Dimensions	219 x 63 x 35.5 mm
Weight	1 kg

CONVEX


Truncated cone surface-mount designed casings with side cable enable very simple installations to the piers, floating pontoons and docks. Single-color light control by using optional momentary switch or optional DMX512 interface MXU01 and PWM dimmer MDU13 with built-in ASTEL protocol.

Features

- Aluminium Bronze Casing
- 6 or 18 High-Power LEDs Design
- Cool White Lighting
- Tempered Glass Optical Window
- Wide Range Power Supply 100-240 Vac
- High-Efficiency Lens
- Polarity Protection
- Transient Protection
- Thermal Protection
- Low Power Consumption
- Simple Installation
- Digital Dimming (optional)
- DMX512 Network Control (optional)




Simply
the brightest.




CONVEX MST0680 AB2WD

Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 6.200 lm
White color temperature	6.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium Bronze (AB2)
Protection	IP 68
Dimensions	Ø 136 x 34 mm
Weight	2.0 kg




Power Supply Unit NPF-60D-24

Input voltage	100-240 Vac, 50/60 Hz
Consumption max.	60 W
Operating temperature	-40°C – +85°C
Casing	Plastic
Protection	IP 67
Dimensions	150 x 53 x 35 mm
Weight	0.5 kg



CONVEX MST18240 AB2WD

Lens Angle	50°
Optical window	6 mm depth tempered glass
Luminous flux	max. 16.000 lm
White color temperature	6.000 K
Operating temperature	-10°C – +50°C
Casing	Aluminium Bronze (AB2)
Protection	IP 68
Dimensions	Ø 166 x 34 mm
Weight	2.7 kg



Power Supply Unit ELG-150-C2100B

Input voltage	100-240 Vac, 50/60 Hz
Consumption	max. 140W
Operating temperature	-10°C – +55°C
Casing	Aluminium
Protection	IP 67
Dimensions	219 x 63 x 35.5 mm
Weight	1 kg

EQUATOR

The EQUATOR series of ultra-thin compact underwater lights are also designed to be used as underwater Dock Lights in combination with MRMN series of dock mounting assembly. The MRMN series supports a range of installation methods, including screw-based wall mounting or a custom clamp system for pillar attachment. Its uniquely designed shape makes it ideal also for installing on underwater pillars, providing even more flexibility for marine lighting applications.

Features:

- For using with EQUATOR series
- Black UHMW-PE body incl. plastic clamps for pillar mounting
- Simple Installation




Simply
the brightest.

Dock Mounting Assembly MRMN0640P

For EQUATOR MSR0640 series


Material UHMW-PE
Dimensions 99 x 69 x 38 mm
Weight 160 g



Dock Mounting Assembly MRMN1280P

For EQUATOR MSR1280 series


Material UHMW-PE
Dimensions 119 x 89 x 38 mm
Weight 250 g



Dock Mounting Assembly MRMN36240P

For EQUATOR MSR36240 series

Material UHMW-PE
Dimensions 139 x 109 x 38 mm
Weight 330 g





MYW868B/CP

- MYW868B/CP-31
- MYW868B/CP-3
- MYW868B/CP-41
- MYW868B/CP-4
- MYW868B/CP-51
- MYW868B/CP-5
- MYW868BE
- MYWR01
- MYWR01EX

Wireless Yacht Control Systems

MYW868B/CP

Patented RF microprocessor-based high-reliable wireless remote control system for motor yachts designed especially for controlling engines, thrusters and anchor windlass. By using the remote controller the skipper has control over his vessel from any spot on the yacht. High-quality switches and keys are used to control both engines, bow and stern thrusters as well as the anchor windlass during anchoring. The remote controller is encased in an ergonomically designed watertight housing ensuring simple operation and portability. Thanks to the carrying cord provided it can even be worn around the neck thus freeing the hands for other tasks during docking. The steering of the vessel is thus always at the skipper's fingertips in case of any corrections of the vessel's movement due to wind or other factors are required. During anchoring, complete control of the vessel is possible from the bow which allows the skipper to precisely determine the position of the anchor and avoid any underwater obstacles. During the weighing of the anchor, proper manoeuvring of the vessel is possible right from its bow, thus avoiding any overloads on the anchor windlass and possible entanglement with another anchor. Dangerous and unforeseeable situations, due to incorrect instructions from crew members, are thus effectively eliminated also during the procedure of tying a line onto a floating buoy. Thanks to the remote controller the skipper can manoeuvre the vessel to the buoy with pinpoint accuracy and secure the line without any assistance. Additional control unit MYW868BE can be supplied to connect the system to the special electronic control heads or to connect to the secondary electronic control head if the yacht is fitted with a fly-bridge.

Features

- High-Reliable Patented Design
 - Port Engine Control
 - Starboard Engine Control
 - Anchor Windlass Control
 - Bow Thruster Control
 - Stern Thruster Control
- Transmit LED Indicator
 - Low Battery LED Indicator
 - ABS Casings with IP65 and IP67 Protection
 - Low-Power Consumption
 - Simple Connecting



When docking becomes a pleasure.



MYW868B/CP

Number of channels 6, 8 or 10
Transmission code 40 bit
Frequency 868 MHz

Transmitter

RF output power max. 10 mW
Power supply 3V lithium battery CR2
Operating temperature 0°C – +50°C
Casing ABS, IP65 protection
Dimensions (L x W x H) 150 x 60 x 34 mm
Weight (incl. battery) 0.2 kg



Receiver

Power requirement 12 – 24 Vdc
Consumption max. 300 mAdc
Operating temperature 0°C – +50°C
Casing ABS, IP65 Protection
Dimensions (L x W x H) 200 x 120 x 55 mm
Weight 0.5 kg

Number of control functions

- 31

 - 2-function control system
 - 1 engine control
 - anchor windlass control
- 3

 - 3-function control system
 - port/starboard engine control
 - anchor windlass control
- 41

 - 3-function control system
 - 1 engine control
 - bow thruster control
 - anchor windlass control
- 4

 - 4-function control system
 - port/starboard engine control
 - bow thruster control
 - anchor windlass control
- 51

 - 4-function control system
 - 1 engine control
 - bow thruster control
 - stern thruster control
 - anchor windlass control
- 5


 - 5-function control system
 - port/starboard engine control
 - bow thruster control
 - stern thruster control
 - anchor windlass control

Additional Control Unit

MYW868BE for connection to the special control stations

Range Extender

MYWR01 for improved signal reception
MYWR01EX for improved signal reception at longer distances

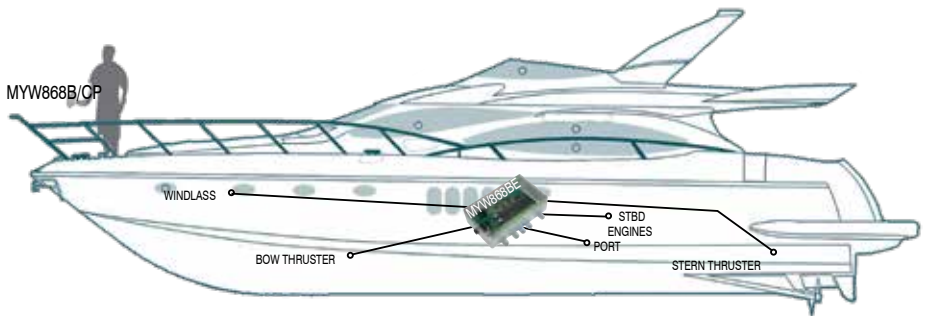

PATENTED



DMX512 Interface MXU01
PWM Dimmer MDU13
Light Control Interface MLC01
Touchscreen Light Control Panel MLT01
Isolation Board IB01
Cofferdam CD01

Accessories

DMX512 Interface

DMX512 to ASTEL protocol multi-light converter to control multi-color light or one group of multi-color lights with built-in ASTEL protocol or to control single-color light or one group of single-color lights by the help of PWM Dimmer MDU13 with built-in ASTEL protocol.

Features

- 1 Control Output
- DIP-switch Programmable
- Multi - Speed Mode
- Wide Range Power Supply
- Low Power Consumption
- Polarity Protection
- Transient Protection
- Short Circuit Output Protection
- Simple Installation

PWM Dimmer

Dimming of single-color lights or group of lights by using optional momentary switch. Three-color light control with dimming and changing of color of lighting manually or automatically through the complete rainbow spectrum by using optional momentary switch. Built-in ASTEL protocol to control single-color lights or three-color lights by using optional DMX512 interface MXU01 or MXU03.


Features

- 3 Control Outputs
- Adjustable PWM Frequency
- Wide Range Power Supply
- Low Power Consumption
- Polarity Protection
- Transient Protection
- Short Circuit Output Protection
- Simple Installation




DMX512 Interface MXU01

Input voltage	12-24 Vdc
Consumption	max. 50 mAdc
Operating temperature	-10°C - +50°C
Casing	ABS
Dimensions	max. 67 x 80 x 21 mm
Weight	0.1 kg

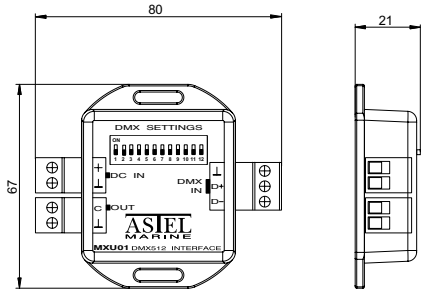

PWM Dimmer MDU13

Input voltage	12-24 Vdc
Consumption	max. 10 mAdc
ASTEL protocol default address	1
Operating temperature	-10°C - +50°C
Casing	ABS
Protection	IP 65
Dimensions	max. 106 x 122 x 55.5 mm
Weight	0.2 kg

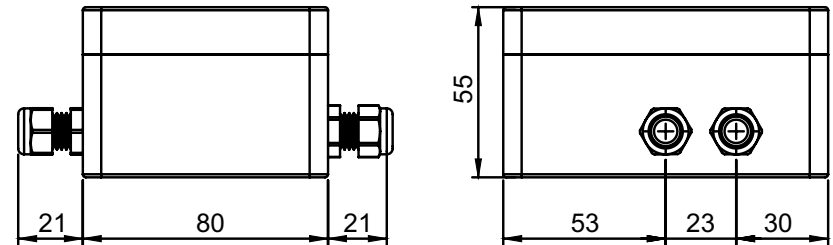

Light Control Interface

Control the full range of Astel Marine LED lights directly from your phone, tablet, PC, or compatible MFD through internet connection. Designed for simple installation and reliable onboard performance, the MLC01 advanced lighting control interface gives you intuitive, multi-zone control over color, brightness, white intensity, effects, and custom scenes.


Features

- 2 Astel / PWM Control Outputs
- 1 DMX512 Output
- 4 Switch Inputs
- 1 Audio Input
- Wide Range Power Supply
- Wi-Fi Connection
- Ethernet Connection
- Phone, Tablet, and PC Support
- Compatible with Garmin – OneHelm™ MFD
- Compatible with Raymarine – Axiom™ MFD
- Multiple Zone Control
- Intuitive Color Wheel for Lighting Adjustment in Each Zone
- Vertical Sliders for Brightness and White Intensity Adjustment in Each Zone
- Control Lighting Across Multiple Zones with Configurable Buttons
- Pre-programmed Effect Modes like Rainbow Change, Flash, or Strobe
- Custom Scenes Activatable via Buttons on Multiple Zones



Light Control Interface MLC01

Input voltage	12-24 Vdc
Consumption	max. 300 mAdc
Operating temperature	-10°C - +50°C
Casing	ABS
Dimensions	108 x 96 x 37 mm
Weight	0.3 kg

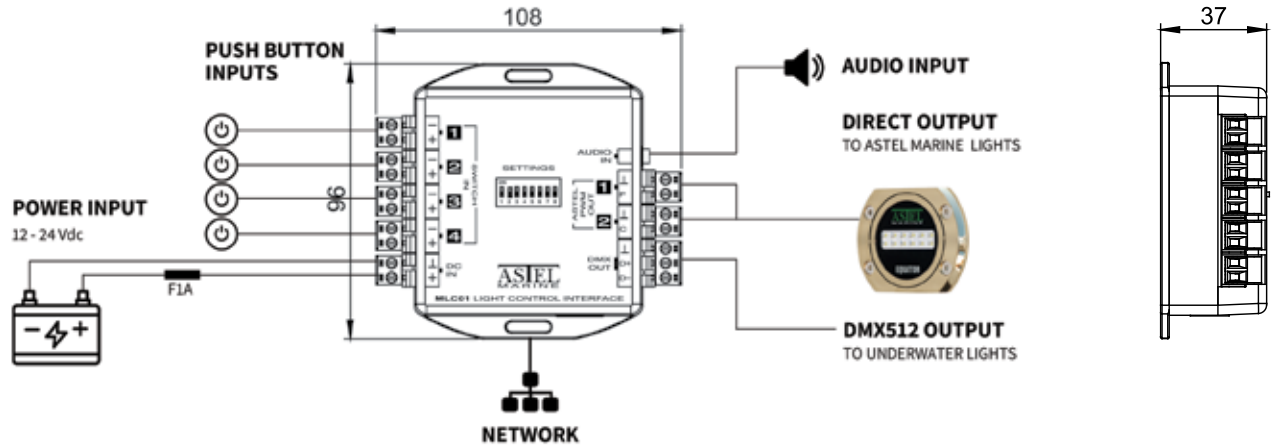

Touchscreen Light Control Panel

The MLT01 Touchscreen Light Control Panel provides a dedicated onboard interface for intuitive control of Astel Marine lighting systems in combination with the MLC01 Light Control Interface.

Designed for permanent installation at the helm, saloon, cockpit, flybridge or other convenient locations onboard, the MLT01 provides immediate access to lighting zones, colors, brightness, white intensity, dynamic effects and custom scenes through a compact 4-inch touchscreen.

Multiple MLT01 panels can be connected to the same MLC01 through the vessel network, creating synchronized control stations throughout the yacht. Lighting settings remain synchronized between the connected panels, allowing the same lighting system to be conveniently controlled from different locations onboard.


Features

- 4" Capacitive Touchscreen
- Dedicated Interface for MLC01
- Synchronized Multi-Station Operation
- Ethernet & Wi-Fi Connectivity
- Power over Ethernet (PoE)
- Compact In-Wall Installation



Touchscreen Light Control Panel MLT01

Display	4" IPS
Resolution	480 × 480 pixels
Touch panel	Capacitive multi-touch
Ethernet	10/100 Mbps
Wi-Fi	IEEE 802.11 b/g/n
Power over Ethernet	IEEE 802.3af
Installation	In-wall
Dimensions	86 x 85 x 36 mm
Operating temperature	-10°C – +60°C
Compatible controller	MLC01 Light Control Interface
Multi-panel operation	Multiple synchronized MLT01 panels per MLC01

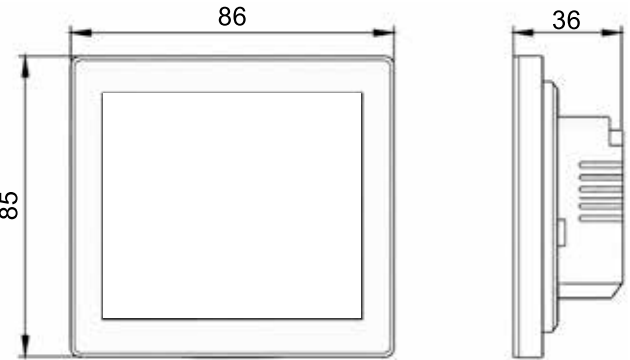

Isolation Board

To protect the Underwater LED Lights against galvanic corrosion where the underwater lights are installed on steel or aluminium hull.

Cofferdam

To install the Superyacht Underwater LED Lights. Enables reliable installation and maintenance. Made of material as specially requested.



Isolation Board IB01

Thickness	1 mm
Material	polycarbonate

Underwater Light series

EQ06	for Equator MSR0640 series
EQ12	for Equator MSR1280 series
EQ36	for Equator MSR36240 series
CU06	for Conus MST0680 and MSR0680 series
CU18	for Conus MST18240 and MSR18240 series
CX06	for Convex MST0680 and MSR0680 series
CX18	for Convex MST18240 and MSR18240 series
PQ06	for Plaque MFM0680 series
PQ18	for Plaque MFM18240 series

Superyacht Underwater Light series

EQ36P	for Equator MSR36240P series
-------	------------------------------


Cofferdam CD01

Superyacht underwater light series

EQ36S	for Equator MSR36240S series
CX18S	for Convex MTH18240S series
CX09P	for Convex MSR09150 series
CX18P	for Convex MSR18300 series
PQ09P	for Plaque MFM09150 series
PQ18P	for Plaque MFM18300 series



Simply
the
brightest.

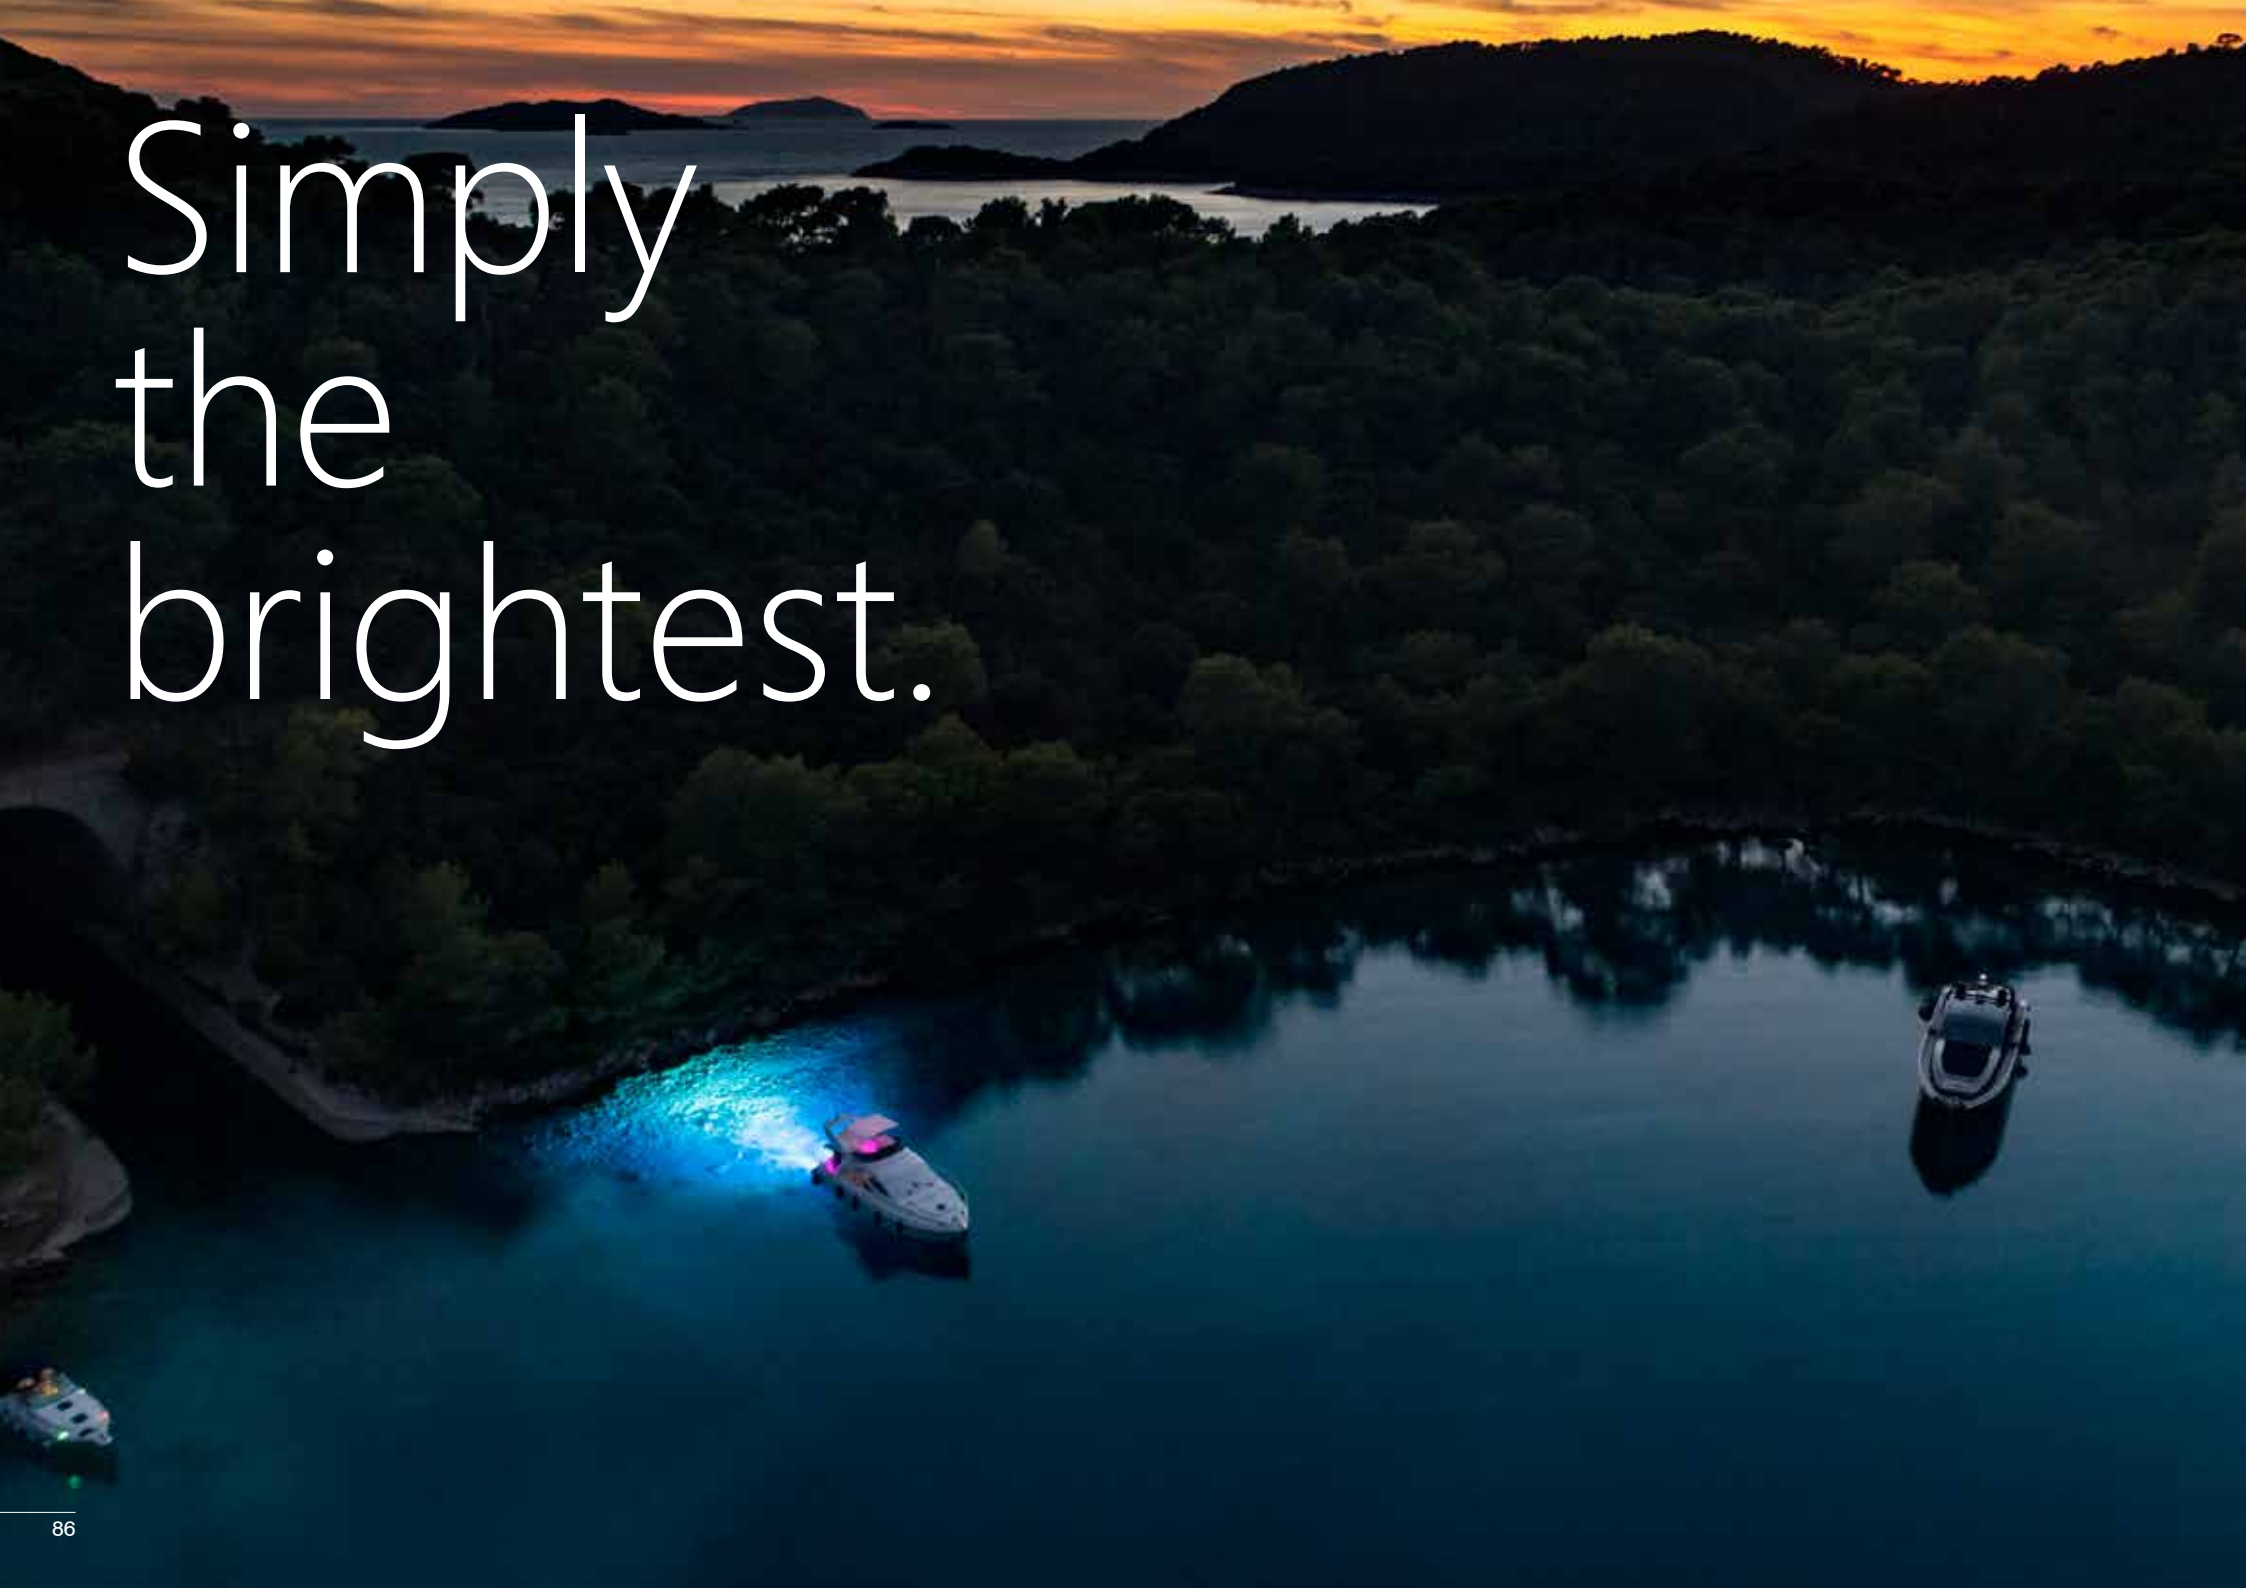

Simply
the
brightest.

Astel Marine is registered trademark of ASTEL d.o.o..

All other trademarks not owned by ASTEL d.o.o. are the property of their respective owners.

Due to continuous product improvement all specifications and design are subject to change without notice.

© 2027 ASTEL d.o.o.



ASTEL d.o.o.
Dutovlje 138
6221 Dutovlje
Slovenia

www.astel-marine.com